


Ingenious locking system: The OBO Quick-Pipe system



OBO
BETTERMANN

Three steps to happiness: Click, insert, twist

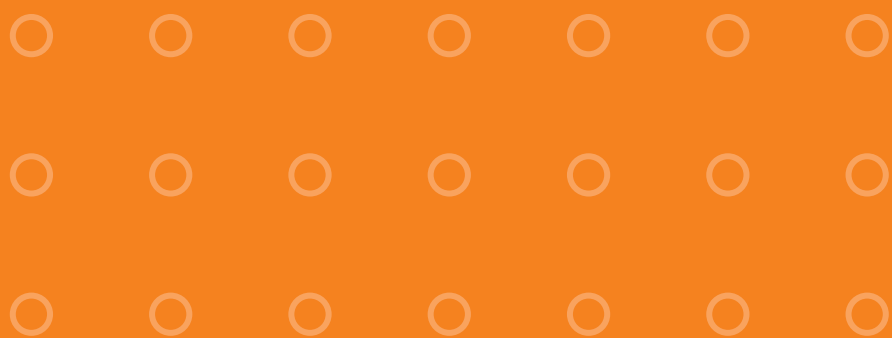

1. Push in Quick-Pipe

A simple operation, as the Quick-Pipe is optimally coordinated with OBO's Junior-Quick clip. For wall mounting the cover hinge points downwards.



2. Insert cable sideways in the Quick-Pipe

Also works very well with pre-assembled cables with plugs.



3. Twist Quick-Pipe in the direction of the hinge – ready

The cover closes automatically and installation is complete.



Simplest retrofitting

Simply twist the cover forwards, the Quick-Pipe opens automatically. Then insert further cables, and turn Quick-Pipe back into the starting position.



Interim solution

There is also a way out in the middle: the cover of the Quick-Pipe is notched with side cutters. A side exit at any point is then possible.





A good combination!

The Quick-Pipe system, the intelligent combination of classic pipe system and open cable-laying, now offers even more advantages. Quick-Pipe is the ideal solution for secure surface installation on walls and ceilings, where cables have to be protected against damage or against dust and dirt. Quick-Pipe is suitable for a wide variety of uses, for 230 V cables but also for data cables, e-optic-cables, coax cables and telephone cables. Of course, the system is tested to VDE 0604.

Softly bedded

Quick-Pipe is also recommended for fibre-optic cables: the gentle insertion from the side avoids kinks and strains.



Open mouldings

The mouldings are easy to open: simply insert a screwdriver in the opening slit and turn.



Open and close again and again

The Quick-Pipe hinge is made from a highly elastic flexible component, so you can open the Quick-Pipe as often as you wish.



Well protected


In combination with the Quick-Pipe mouldings and the Junior-Quick clips the system achieves protection class IP 44.



Child's play!

It is as easy as can be to use: fit the Junior-Quick clip, cut Quick-Pipe to length, clip it in, then insert the cables, turn backwards – ready. With the intelligent construction the Quick-Pipe closes automatically. Suitable mouldings allow flexible routing. The two-part mouldings are simply clipped together and can be opened again easily with a screwdriver.

Quick-Pipe is available in the popular colours light grey and pure white, and is supplied in practical 2 m lengths in a handy box.

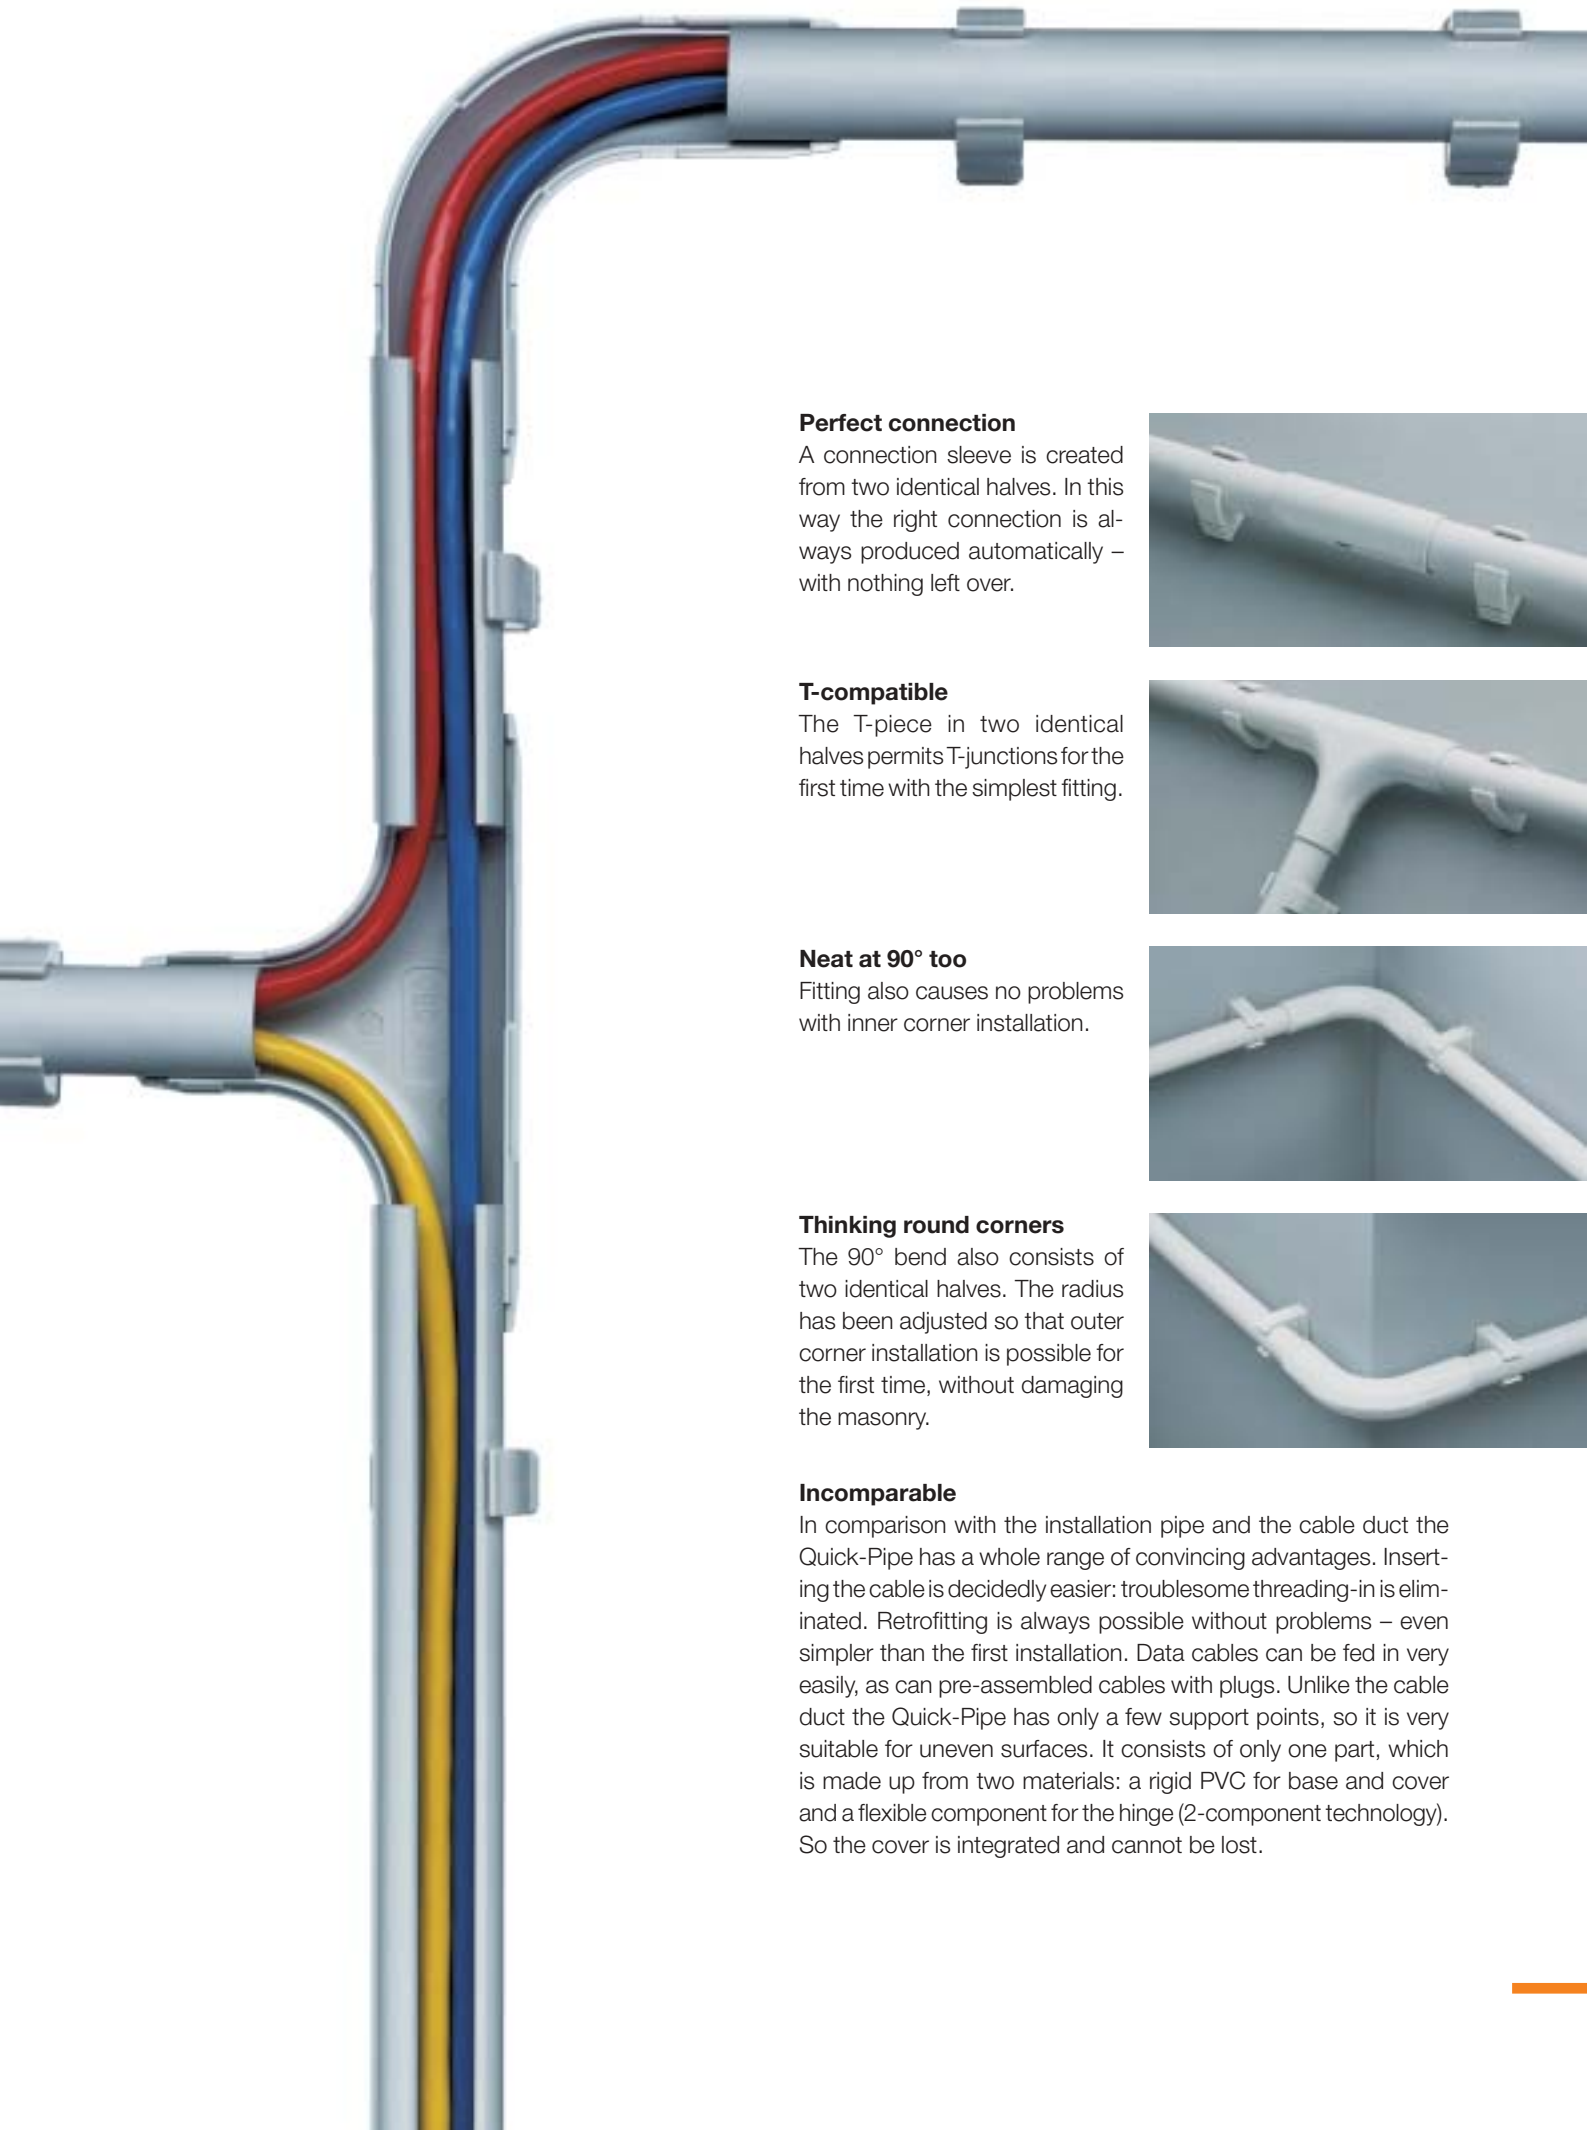

Perfect connection

A connection sleeve is created from two identical halves. In this way the right connection is always produced automatically – with nothing left over.



T-compatible

The T-piece in two identical halves permits T-junctions for the first time with the simplest fitting.



Neat at 90° too

Fitting also causes no problems with inner corner installation.



Thinking round corners

The 90° bend also consists of two identical halves. The radius has been adjusted so that outer corner installation is possible for the first time, without damaging the masonry.



Incomparable

In comparison with the installation pipe and the cable duct the Quick-Pipe has a whole range of convincing advantages. Inserting the cable is decidedly easier: troublesome threading-in is eliminated. Retrofitting is always possible without problems – even simpler than the first installation. Data cables can be fed in very easily, as can pre-assembled cables with plugs. Unlike the cable duct the Quick-Pipe has only a few support points, so it is very suitable for uneven surfaces. It consists of only one part, which is made up from two materials: a rigid PVC for base and cover and a flexible component for the hinge (2-component technology). So the cover is integrated and cannot be lost.





A perfect fit: Accessories

OBO Quick-Pipe (supply length 2 m)

Model	Transp. box m	Order No. light grey	Order No. pure white
2953/M16	50	2153 90 4	2153 96 0
2953/M20	40	2153 91 2	2153 96 3
2953/M25	30	2153 92 0	2153 96 6
2953/M32	20	2153 93 9	2153 96 9

Connection sleeves

Model	Pack/qty	Order No.	Order No.
2953/M16-M	10	2153 82 9	2153 97 1
2953/M20-M	10	2153 83 1	2153 97 3
2953/M25-M	10	2153 83 3	2153 97 5
2953/M32-M	10	2153 83 5	2153 97 7

Bends 90°

Model	Pack/qty	Order No.	Order No.
2953/M16-B	5	2153 86 4	2153 98 0
2953/M20-B	5	2153 86 6	2153 98 2
2953/M25-B	5	2153 86 8	2153 98 4
2953/M32-B	5	2153 87 0	2153 98 6

T-pieces

Model	Pack/qty	Order No.	Order No.
2953/M16-T	5	2153 87 2	2153 99 2
2953/M20-T	5	2153 87 4	2153 99 4
2953/M25-T	5	2153 87 6	2153 99 6
2953/M32-T	5	2153 87 8	2153 99 8

OBO Junior-Quick clip (halogen-free)

Model	Pack/qty	Order No.	Order No.
2950/M16	100	2154 10 2	-
2950/M20	100	2154 12 9	-
2950/M25	100	2154 27 7	-
2950/M32	50	2154 28 5	-

OBO Junior-Quick clip

Model	Pack/qty	Order No. stone grey	Order No. pure white
2950 F/M16	100	2154 60 5	2154 64 1
2950 F/M20	100	2154 60 9	2154 64 5
2950 F/M25	100	2154 61 7	2154 65 0
2950 F/M32	50	2154 61 9	2154 65 4

Fixing accessories

Name	Model	Dimensions	Order No.
Angler expanding plug	910/N	6.0 x 30	2349 05 1
Multi-purpose plug	910/MZ	6.0 x 35	2347 53 9
Aerated concrete plug	910/GD	6.0 x 35	2347 22 9
Knock-in fixing	910/SD-Q	6.0 x 40	2351 21 8
Knock-in fixing	910/SD	5.0 x 35	2351 02 1
Golden Sprint screw	4758	4.5 x 40	3195 45 7

All in white

This Quick-Pipe system is ideal for all white backgrounds: all parts, including the accessories, are also available in pure white.



Please take it with you

The transport-friendly packaging is stable and fits into any service van.



The fantastic four

Quick-Pipe combines the advantages of cable duct and installation pipe in an intelligent system. It allows neat and secure surface installation of all kinds of cables on walls and ceilings – even in the same pipe. Quick-Pipe is available in four metric sizes: M16, M20, M25 and M32. The supply length is 2 m. The system is VDE-tested and achieves protection class IP 44. The mouldings are part of the system. The Quick-Pipe is also available in pure white – and is also pleasing to the eyes of demanding installers and clients.



OBO. Used by professionals.



© OBO BETTERMANN Order No. 9149058 10/2002 GB

OBO
BETTERMANN